



- High CV Product
- Screw Terminals
- Suitable for use in most demanding applications requiring high current filtering or energy storage
- Custom Designs Available Upon Request

**GENERAL SPECIFICATIONS**

Operating Temperature:

- 40°C to +85°C

Voltage Range:

350 WVDC to 500 WVDC

Capacitance Range: 75µF to 12,000µF

Capacitance Tolerance:

-10% +75% (50-150 WVDC)

-10% +50% (200-450 WVDC)

DC Leakage Current:

$I = .006 VCV$  after 5 minutes

Not to exceed 6mA

C = Capacitance in µf

V = Rated Voltage


I = Leakage Current in mA

QA Stability Test:

Apply WVDC for 5,000 hours at 85°C

- Capacitance change  $\leq 10\%$  from initial limits
- DC leakage current meets initial limits
- ESR  $\leq 175\%$  of initial measured value

**High Post (H) (Standard)**

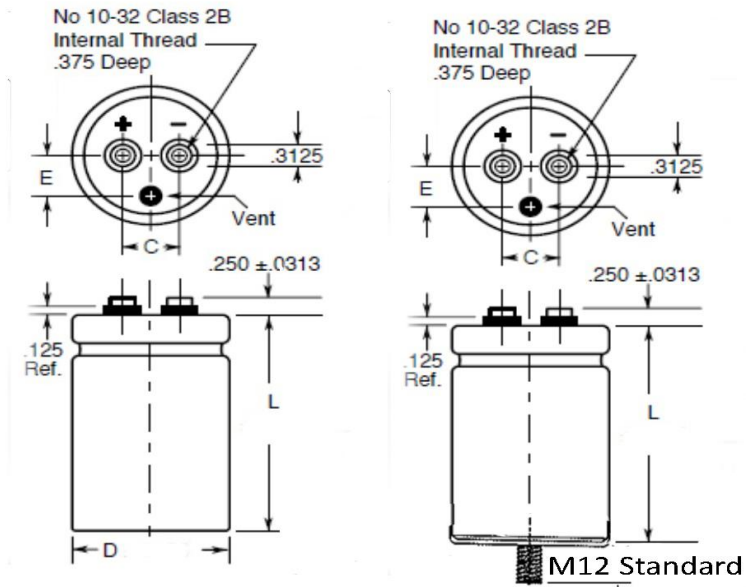

- \* Special Terminals are available upon request:
- Low Post, Low Resistance Screw Mount (1/4 - 28 Thread)
  - High Post Metric Thread
  - Low Post Metric Thread
  - High Post, Low Resistance Screw Mount (1/4 - 28 Thread)

Add .015 inches to diameter and .045 inches to length for PVC insulating sleeve.

# Aluminum Electrolytic Capacitors N535 Series

NationCap

Rated Voltage (VDC)	Capacitance(μF)	Diameter (mm / Inches)	Height (mm / Inches)
350VDC; 400VDC Surge	130	34.925 / 1.375	53.975 / 2.125
	250	34.925 / 1.375	79.375 / 3.125
	330	34.925 / 1.375	79.375 / 3.125
	380	34.925 / 1.375	104.775 / 4.125
	480	34.925 / 1.375	66.675 / 2.625
	620	34.925 / 1.375	79.375 / 3.125
	650	50.8 / 2.000	79.375 / 3.125
	800	50.8 / 2.000	104.775 / 4.125
	920	34.925 / 1.375	104.775 / 4.125
	1000	34.925 / 1.375	104.775 / 4.125
	1000	50.8 / 2.000	66.675 / 2.625
	1000	50.8 / 2.000	104.775 / 4.125
	1300	50.8 / 2.000	79.375 / 3.125
	1300	76.2 / 3.000	104.775 / 4.125
	1400	34.925 / 1.375	142.875 / 5.625
	1500	44.45 / 1.750	104.775 / 4.125
	1500	63.5 / 2.500	104.775 / 4.125
	1600	50.8 / 2.000	104.775 / 4.125
	1900	50.8 / 2.000	104.775 / 4.125
	2100	63.5 / 2.500	142.875 / 5.625
	2100	76.2 / 3.000	104.775 / 4.125
	2200	63.5 / 2.500	142.875 / 5.625
	2400	50.8 / 2.000	117.475 / 4.625
	2400	50.8 / 2.000	142.875 / 5.625
	2600	76.2 / 3.000	142.875 / 5.625
	2700	63.5 / 2.500	92.075 / 3.625
	2900	76.2 / 3.000	142.875 / 5.625
	3000	76.2 / 3.000	149.225 / 5.875
	3200	63.5 / 2.500	104.775 / 4.125
	3300	50.8 / 2.000	142.875 / 5.625
	3300	76.2 / 3.000	142.875 / 5.625
	3400	76.2 / 3.000	142.875 / 5.625
	3700	76.2 / 3.000	142.875 / 5.625
	3800	63.5 / 2.500	117.475 / 4.625
4000	76.2 / 3.000	79.375 / 3.125	
4200	76.2 / 3.000	104.775 / 4.125	
4800	63.5 / 2.500	142.875 / 5.625	
6100	76.2 / 3.000	219.075 / 8.625	
6300	76.2 / 3.000	142.875 / 5.625	
6400	76.2 / 3.000	130.175 / 5.125	
6900	76.2 / 3.000	219.075 / 8.625	
7200	76.2 / 3.000	142.875 / 5.625	
7300	76.2 / 3.000	142.875 / 5.625	
7900	76.2 / 3.000	149.225 / 5.875	
8500	76.2 / 3.000	219.075 / 8.625	
10000	76.2 / 3.000	219.075 / 8.625	
12000	76.2 / 3.000	219.075 / 8.625	
400VDC; 450VDC Surge	290	34.925 / 1.375	53.975 / 2.125
	420	34.925 / 1.375	66.675 / 2.625
	550	34.925 / 1.375	79.375 / 3.125
	780	50.8 / 2.000	104.775 / 4.125
	810	34.925 / 1.375	104.775 / 4.125
	1100	50.8 / 2.000	79.375 / 3.125
	1200	34.925 / 1.375	142.875 / 5.625
	1300	44.45 / 1.750	104.775 / 4.125
	1700	50.8 / 2.000	104.775 / 4.125
	2600	50.8 / 2.000	142.875 / 5.625
	2700	63.5 / 2.500	104.775 / 4.125
	2800	63.5 / 2.500	104.775 / 4.125
	4200	63.5 / 2.500	142.875 / 5.625
	4300	63.5 / 2.500	142.875 / 5.625
	5700	76.2 / 3.000	130.175 / 5.125
	6400	76.2 / 3.000	142.875 / 5.625
	7000	76.2 / 3.000	149.225 / 5.875
8500	76.2 / 3.000	171.45 / 6.750	
11000	76.2 / 3.000	219.075 / 8.625	

Rated Voltage (VDC)	Capacitance(μF)	Diameter (mm / Inches)	Height (mm / Inches)
<b>450VDC; 525VDC Surge</b>	75	34.925 / 1.375	53.975 / 2.125
	100	34.925 / 1.375	53.975 / 2.125
	140	34.925 / 1.375	79.375 / 3.125
	170	34.925 / 1.375	79.375 / 3.125
	210	34.925 / 1.375	104.775 / 4.125
	240	34.925 / 1.375	53.975 / 2.125
	250	34.925 / 1.375	104.775 / 4.125
	320	50.8 / 2.000	79.375 / 3.125
	350	34.925 / 1.375	66.675 / 2.625
	350	34.925 / 1.375	130.175 / 5.125
	400	34.925 / 1.375	142.875 / 5.625
	450	50.8 / 2.000	79.375 / 3.125
	460	34.925 / 1.375	79.375 / 3.125
	480	50.8 / 2.000	104.775 / 4.125
	620	50.8 / 2.000	66.675 / 2.625
	650	50.8 / 2.000	104.775 / 4.125
	680	34.925 / 1.375	104.775 / 4.125
	800	50.8 / 2.000	117.475 / 4.625
	930	50.8 / 2.000	79.375 / 3.125
	970	50.8 / 2.000	104.775 / 4.125
	1000	63.5 / 2.500	104.775 / 4.125
	1000	34.925 / 1.375	117.475 / 4.625
	1000	50.8 / 2.000	92.075 / 3.625
	1000	63.5 / 2.500	104.775 / 4.125
	1100	44.45 / 1.750	104.775 / 4.125
	1100	76.2 / 3.000	104.775 / 4.125
	1400	50.8 / 2.000	104.775 / 4.125
	1400	50.8 / 2.000	117.475 / 4.625
	1400	50.8 / 2.000	142.875 / 5.625
	1400	63.5 / 2.500	104.775 / 4.125
	1400	63.5 / 2.500	130.175 / 5.125
	1500	76.2 / 3.000	104.775 / 4.125
	1500	76.2 / 3.000	130.175 / 5.125
	1700	63.5 / 2.500	92.075 / 3.625
	1800	50.8 / 2.000	142.875 / 5.625
	1800	76.2 / 3.000	149.225 / 5.875
	1900	76.2 / 3.000	142.875 / 5.625
	2000	76.2 / 3.000	130.175 / 5.125
	2000	76.2 / 3.000	142.875 / 5.625
	2200	50.8 / 2.000	142.875 / 5.625
	2200	76.2 / 3.000	104.775 / 4.125
	2300	76.2 / 3.000	92.075 / 3.625
	2300	63.5 / 2.500	104.775 / 4.125
	2400	63.5 / 2.500	104.775 / 4.125
	2400	63.5 / 2.500	117.475 / 4.625
2400	76.2 / 3.000	142.875 / 5.625	
2500	76.2 / 3.000	92.075 / 3.625	
2700	63.5 / 2.500	104.775 / 4.125	
3100	63.5 / 2.500	142.875 / 5.625	
3300	76.2 / 3.000	142.875 / 5.625	
3500	63.5 / 2.500	142.875 / 5.625	
3600	63.5 / 2.500	142.875 / 5.625	
3600	76.2 / 3.000	117.475 / 4.625	
4600	76.2 / 3.000	142.875 / 5.625	
4700	76.2 / 3.000	130.175 / 5.125	
5300	76.2 / 3.000	142.875 / 5.625	
5800	76.2 / 3.000	149.225 / 5.875	
7700	76.2 / 3.000	219.075 / 8.625	
9000	76.2 / 3.000	219.075 / 8.625	
<b>500VDC; 535VDC Surge</b>	160	34.925 / 1.375	53.975 / 2.125
	240	34.925 / 1.375	66.675 / 2.625
	240	44.45 / 1.750	53.975 / 2.125
	310	34.925 / 1.375	79.375 / 3.125
	310	50.8 / 2.000	53.975 / 2.125
	360	44.45 / 1.750	66.675 / 2.625
	380	34.925 / 1.375	92.075 / 3.625
	450	34.925 / 1.375	104.775 / 4.125
	460	50.8 / 2.000	66.675 / 2.625
	230	34.925 / 1.375	117.475 / 4.625
	600	34.925 / 1.375	130.175 / 5.125
	620	44.45 / 1.750	92.075 / 3.625
	620	50.8 / 2.000	79.375 / 3.125
	670	50.8 / 2.000	79.375 / 3.125
	750	34.925 / 1.375	142.875 / 5.625
	790	50.8 / 2.000	92.075 / 3.625
	880	44.45 / 1.750	117.475 / 4.625
	950	50.8 / 2.000	104.775 / 4.125
	1000	44.45 / 1.750	130.175 / 5.125
	1000	63.5 / 2.500	79.375 / 3.125
1100	44.45 / 1.750	142.875 / 5.625	

<b>1100</b>	<b>50.8 / 2.000</b>	<b>117.475 / 4.625</b>
<b>1300</b>	<b>50.8 / 2.000</b>	<b>130.175 / 5.125</b>
<b>1300</b>	<b>63.5 / 2.500</b>	<b>92.075 / 3.625</b>
<b>1500</b>	<b>50.8 / 2.000</b>	<b>142.875 / 5.625</b>
<b>1600</b>	<b>63.5 / 2.500</b>	<b>104.775 / 4.125</b>
<b>1800</b>	<b>63.5 / 2.500</b>	<b>117.475 / 4.625</b>
<b>1900</b>	<b>76.2 / 3.000</b>	<b>92.075 / 3.625</b>
<b>2100</b>	<b>63.5 / 2.500</b>	<b>130.175 / 5.125</b>
<b>2300</b>	<b>76.2 / 3.000</b>	<b>104.775 / 4.125</b>
<b>2400</b>	<b>63.5 / 2.500</b>	<b>142.875 / 5.625</b>
<b>2700</b>	<b>88.9 / 3.500</b>	<b>92.075 / 3.625</b>
<b>2800</b>	<b>76.2 / 3.000</b>	<b>117.475 / 4.625</b>
<b>3200</b>	<b>76.2 / 3.000</b>	<b>130.175 / 5.125</b>
<b>3300</b>	<b>88.9 / 3.500</b>	<b>104.775 / 4.125</b>
<b>3500</b>	<b>76.2 / 3.000</b>	<b>142.875 / 5.625</b>
<b>4400</b>	<b>88.9 / 3.500</b>	<b>130.175 / 5.125</b>
<b>4800</b>	<b>88.9 / 3.500</b>	<b>142.875 / 5.625</b>
<b>6000</b>	<b>76.2 / 3.000</b>	<b>219.075 / 8.625</b>
<b>8300</b>	<b>88.9 / 3.500</b>	<b>219.075 / 8.625</b>